



Advantage PressurePro, LLC
205 W Wall Street, Harrisonville, MO 64701

For ordering/assistance, please contact your dealer.
To activate your warranty, visit www.pressurepro.us
and select the "Register Your Product" quick link.

WARNING



This product contains chemicals, including Carbon Black, known to the State of California to cause cancer and birth defects/other reproductive harm. For more info. visit www.P65Warnings.ca.gov.



FC CE RoHS




Connect with us @PressureProTPMS



PULSE FX QUICK START GUIDE

For use with PressurePro FX and both
Fleet TPMS and Consumer TPMS apps.



Welcome

Thank you for choosing PressurePro

The Originals in TPMS, PressurePro has pioneered the innovation and advancement of Tire Performance Management technology since 1991. Maintaining our family-owned business roots and ideals, we remain driven to add safety and savings to every road – or off-road – you travel, by providing the world's most reliable, accurate and advanced Tire Performance Management Solutions.

'Meet' our team and learn more about our comprehensive line of American Built solutions, at www.pressurepro.us.

What's Included



Pulse FX



Fixed End
Power Cord



Dipole
Antenna

or



Sensors



Mounting Pads
(hook-&-loop)



Coax Cable

'Not so hard'ware.

1. Select your preferred FX mounting location.

Select where you'd like to place your FX, but don't adhere it quite yet. Keep in mind that your FX provides visual alerts even if your Smart device is out of range, so we recommend a discreet, but visible location where you can easily route cabling.

2. Give it power.

Your FX kit includes a fixed end power cable. Plug the 6 pin directly to your FX, and the accessory plug to a 12v source.

3. Add some reception.

Use the included antenna installation instructions (next page) to choose your ideal mounting location. Once chosen, attach the SMA end to your FX and route (and hide) cable as needed.

Now, go ahead and use your adhesive pads to mount your FX.

3

Button and LED Guide

Solid blue Bluetooth LED

FX is powered and paired.

Blinking blue Bluetooth LED


FX is powered but not paired. Open app and pair device.

Red (slow blink)

Alert status. Open app for full alert information and correct as soon as possible.

Red (fast blink)

Critical alert status. Open app for full alert information and correct immediately.

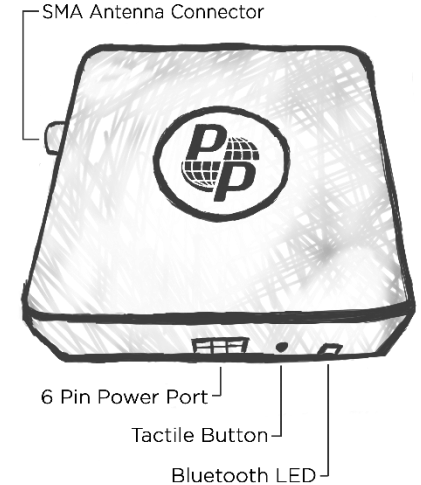

4

Dipole Antenna Installation Example

Intended for combined unit/rig lengths less than 32 foot.

FX is mounted in a visible location to provide alerts even if your smart device is unavailable or unpaired.

Dipole antenna is routed from the FX and mounted in the top, center of the front windshield. (Routing and mounting to the back windshield is also acceptable.)



5

Coax Cable Installation Best Practices

Suggested for optimal Sensor reception.


Route the coax cable out of the cab, under the vehicle. Continue along the frame toward the rear, selecting a centralized mounting location as far back as possible, with adequate line of sight to all tires. (Typically to a rear cross-member or sub-frame.)

Secure "L" bracket tightly to selected location, ensuring a proper ground.

Secure TNC connector to 'L' bracket.

Attach 7" whip antenna to TNC Connector.

The whip antenna should be positioned pointing down, with adequate ground clearance.

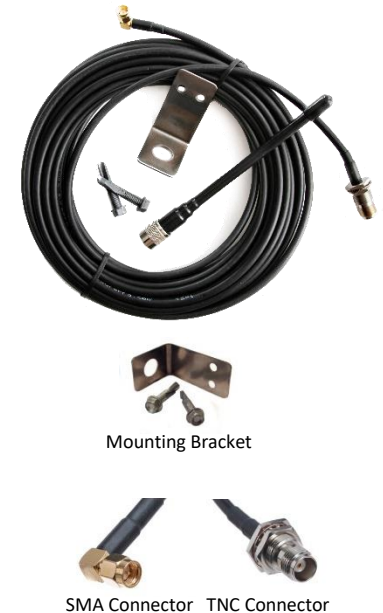

6

Get the app.

Visit your app/play store and download the appropriate PressurePro app.



Consumer TPMS for the aware driver/traveler

For the individual who cares about his/her vehicles and toys. Features real time readings and alerts, as well as 30 days of free performance history.



Fleet TPMS for advanced/fleet applications

For remotely monitoring multiple units. Features email alerts, reporting, performance analysis and more. **Paid subscription to PressurePro Connect required.*

Note: Connect subscribers utilizing Consumer TPMS will experience limited functionality; preventing your FX from performing through Connect as intended.

7

Get with the 'Program'!

One last, *critical* step before we program... **ensure your tires are filled to their optimal pressures!** PressurePro recommends installing in the morning, or while tires are at 'cold' pressure levels. Now... let's program!



Open your PressurePro app and log in. (Consumer TPMS users will complete Sign Up.)



Once logged in, click Connect Device. Select your FX from the list of available devices and pair.

Fleet TPMS users: select Add Unit/Create New from the top Menu.



Select your type of vehicle/unit type or create your vehicle layout by swiping axes off/on to match your set-up. (If programming more than one unit, program individually.)



Once your unit populates, choose your preferred Sensor programming method:

New Air = Sensor programming via installation

Scan = Sensor programming via Camera scanning of data matrix

Manual = Sensor programming via typing of serial number

9

Get 'Connected' with **PressurePro** (For Fleet TPMS Users only) **connect**

Before configuring your set-up using the Fleet TPMS app, you'll need access to your account within PressurePro's Connect platform (<https://connect.pressurepro.us>). For access:

1. Your fleet must have been created as an entity by your PressurePro representative. (Good news, by the time you have received your FX, this *should* be completed.)
2. You (or your fleet's controller) will need to add your FX serial number to your account/terminal.
3. You will need to be added as a user to the account. **Note, drivers do not have installation or editing rights. Contact your fleet's PressurePro administrator for assistance.*



For detailed information on Connect, and how to perform each of these steps, please contact your fleet's PressurePro rep.

8



Tip: Take a moment to read 'Tire Wizard' notes as they appear. They'll guide you through quick programming.



Select the tire location you wish to program first. Once selected, attach Sensor (or scan QR/input serial number), and wait for the sensor serial number to populate. Repeat for all locations. **Do not select 'save' until all Sensors are programmed.**

Your smart device needs to stay within Bluetooth range while programming Sensors. We recommend leaving your device in-cab during Sensor installation.



Set your reference pressures. (Hint: For your convenience, we allow you to set reference pressures by vehicle or by axle.)



Your unit is programmed! You can now view your unit(s) or program another.

10

Now what?

Congratulations, you're installed! Here's a few more things you can do to ensure ease of use and top performance!



Name your vehicle/units: Tap the settings menu choose the vehicle you'd like to name, select 'Vehicle Info' and name your unit.




Name your FX: Tap the settings menu choose 'FX Settings'. Select 'Pulse_FX' and type in desired name. (PressurePro suggests naming the FX the same name as the Vehicle.)



Customize your alerts: Tap the settings menu choose the vehicle you'd like to edit and select 'Alerts' to customize your comprehensive alert schedule.

We've Got Your Back

Need a little more assistance? Use the QR codes below to visit our support folders where you'll find video walks throughs and more!

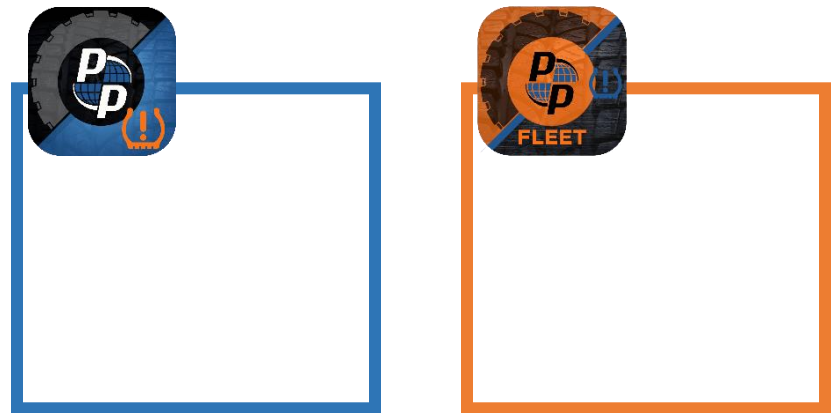

FAQ

Can I perform a factory reset? Yes. You can perform either a vehicle factory reset, or a complete FX factory reset. Go to your Settings Menu and select your vehicle/unit, or 'FX Settings', based on what you want to reset. Select 'Factory Reset' and follow the prompts to complete reset. Hint: If performing a complete factory reset, a tactile button press will be required for confirmation.

How many devices can I pair to my FX? While you can pair your FX to as many devices as you'd like to use for monitoring your equipment, only one device can be actively paired at a time.

Will uninstalling my app, or getting a new phone, delete my settings? No. Your settings will remain safely stored in your FX.

How many units can I monitor with my FX? Consumer TPMS users can store and use up to 5 units simultaneously. Fleet TPMS users can store unlimited units in the cloud, with the ability to activate up to 5 units simultaneously.

Why, after un-powering my FX, do my pressures not show? If your FX loses power, it can take up to 5 minutes for your Sensors to refresh and report readings. We recommend powering your FX with a continuously powered 12v outlet, or hardwiring.

Notes
